



- executie conform normei EN ISO 14122 si SR EN 131-7
- panta de urcare: 60 grade
- lonjeroane , balustrazi, suporturi : aluminiu AlMgSi
- elementele de asamblare : otel zincat sau vopsit in pulbere
- greutatea maxima suportata :



- a) pe podina: 400 kg
- b) pe o treapta: 200 kg

- indiferent de latimea treptelor (60, 80 sau 100 cm) podina este extinsa la dimensiunea de 110 x 220 cm
- **PODINA SI TREPTELE** au suprafetele din:

1. Aluminiu striat sau
2. Tabla expandata zincata sau
3. Tego antiderapant

• In TABELUL DE PRETURI se poate selecta:

1. Suprafata podinii si treptelor si
2. Latimea podinii si a treptelor

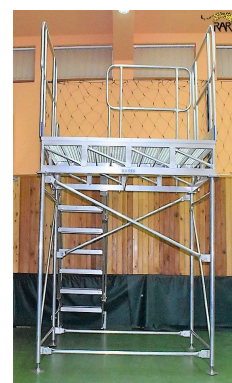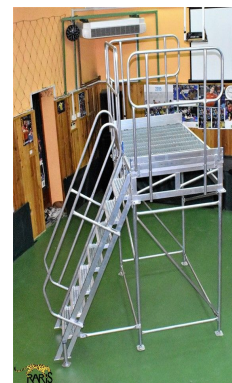

Cod produs	Nr. trepte	Inaltime podina [m]	Inaltime platforma [m]	Lungime platforma [m]	Masa [kg]	Inaltime max. de lucru [m]
P2F6064A	4	1,0	2,1	1,6	99.3	3.0
P2F6065A	5	1,2	2,3	1,7	105.7	3.2
P2F6066A	6	1,5	2,6	1,9	110.4	3.5
P2F6067A	7	1,7	2,8	2,0	115.2	3.7
P2F6068A	8	2,0	3,1	2,2	120.0	4.0
P2F6069A	9	2,2	3,3	2,3	124.8	4.2
P2F60610A	10	2,5	3,6	2,5	129.6	4.5
P2F60611A	11	2,7	3,8	2,6	134.3	4.7
P2F60612A	12	3,0	4,1	2,8	139.1	5.0
P2F60613A	13	3,2	4,3	2,9	143.9	5.2
P2F60614A	14	3,5	4,6	3,0	148.7	5.5

Cod produs	Nr. trepte	Inaltime podina [m]	Inaltime platforma [m]	Lungime platforma [m]	Masa [kg]	Inaltime max. de lucru [m]
P2F6064T	4	1,0	2,1	1,6	95.6	3.0
P2F6065T	5	1,2	2,3	1,7	100.8	3.2
P2F6066T	6	1,5	2,6	1,9	105.8	3.5
P2F6067T	7	1,7	2,8	2,0	111.0	3.7
P2F6068T	8	2,0	3,1	2,2	116.2	4.0
P2F6069T	9	2,2	3,3	2,3	121.4	4.2
P2F60610T	10	2,5	3,6	2,5	126.6	4.5
P2F60611T	11	2,7	3,8	2,6	131.7	4.7
P2F60612T	12	3,0	4,1	2,8	136.9	5.0
P2F60613T	13	3,2	4,3	2,9	142.1	5.2
P2F60614T	14	3,5	4,6	3,0	147.3	5.5

Cod produs	Nr. trepte	Inaltime podina [m]	Inaltime platforma [m]	Lungime platforma [m]	Masa [kg]	Inaltime max. de lucru [m]
P2F6064G	4	1,0	2,1	1,6	92.4	3.0
P2F6065G	5	1,2	2,3	1,7	97.0	3.2
P2F6066G	6	1,5	2,6	1,9	101.5	3.5
P2F6067G	7	1,7	2,8	2,0	106.2	3.7
P2F6068G	8	2,0	3,1	2,2	110.8	4.0
P2F6069G	9	2,2	3,3	2,3	115.4	4.2
P2F60610G	10	2,5	3,6	2,5	120.0	4.5
P2F60611G	11	2,7	3,8	2,6	124.5	4.7
P2F60612G	12	3,0	4,1	2,8	129.2	5.0
P2F60613G	13	3,2	4,3	2,9	133.8	5.2
P2F60614G	14	3,5	4,6	3,0	138.5	5.5

Cod produs	Nr. trepte	Inaltime podina [m]	Inaltime platforma [m]	Lungime platforma [m]	Masa [kg]	Inaltime max. de lucru [m]
P2F6084A	4	1,0	2,1	1,6	100.1	3.0

## Platforma RARIS fixa, la 60<sup>0</sup>, rigidizata, cu podina extinsa, Gmax = 400 kg, tip P2F60


P2F6085A	5	1,2	2,3	1,7	106.7	3.2
P2F6086A	6	1,5	2,6	1,9	111.8	3.5
P2F6087A	7	1,7	2,8	2.0	116.9	3.7
P2F6088A	8	2,0	3,1	2.2	121.9	4.0
P2F6089A	9	2,2	3,3	2.3	127	4.2
P2F60810A	10	2,5	3,6	2,5	132.1	4.5
P2F60811A	11	2,7	3,8	2,6	137.2	4.7
P2F60812A	12	3,0	4,1	2,8	142.2	5.0
P2F60813A	13	3,2	4,3	2,9	147.3	5.2
P2F60814A	14	3,5	4,6	3.0	152.4	5.5
Cod produs	Nr. trepte	Inaltime podina [m]	Inaltime platforma [m]	Lungime platforma [m]	Masa [kg]	Inaltime max. de lucru [m]
P2F6084T	4	1,0	2,1	1,6	97.5	3.0
P2F6085T	5	1,2	2,3	1,7	103.4	3.2
P2F6086T	6	1,5	2,6	1,9	109.1	3.5
P2F6087T	7	1,7	2,8	2.0	114.9	3.7
P2F6088T	8	2,0	3,1	2.2	120.8	4.0
P2F6089T	9	2,2	3,3	2.3	126.6	4.2
P2F60810T	10	2,5	3,6	2,5	132.5	4.5
P2F60811T	11	2,7	3,8	2,6	138.2	4.7
P2F60812T	12	3,0	4,1	2,8	144.0	5.0
P2F60813T	13	3,2	4,3	2,9	149.9	5.2
P2F60814T	14	3,5	4,6	3.0	155.7	5.5
Cod produs	Nr. trepte	Inaltime podina [m]	Inaltime platforma [m]	Lungime platforma [m]	Masa [kg]	Inaltime max. de lucru [m]
P2F6084G	4	1,0	2,1	1,6	93.0	3.0
P2F6085G	5	1,2	2,3	1,7	97.8	3.2
P2F6086G	6	1,5	2,6	1,9	102.4	3.5
P2F6087G	7	1,7	2,8	2.0	107.3	3.7
P2F6088G	8	2,0	3,1	2.2	112.1	4.0
P2F6089G	9	2,2	3,3	2.3	116.9	4.2
P2F60810G	10	2,5	3,6	2,5	121.7	4.5
P2F60811G	11	2,7	3,8	2,6	126.4	4.7
P2F60812G	12	3,0	4,1	2,8	131.2	5.0
P2F60813G	13	3,2	4,3	2,9	136.0	5.2
P2FM60814G	14	3,5	4,6	3.0	140.8	5.5
Cod produs	Nr. trepte	Inaltime podina [m]	Inaltime platforma [m]	Lungime platforma [m]	Masa [kg]	Inaltime max. de lucru [m]
P2F60104A	4	1,0	2,1	1,6	101.0	3.0
P2F60105A	5	1,2	2,3	1,7	107.9	3.2
P2F60106A	6	1,5	2,6	1,9	113.2	3.5
P2F60107A	7	1,7	2,8	2.0	118.7	3.7
P2F60108A	8	2,0	3,1	2.2	124.0	4.0
P2F60109A	9	2,2	3,3	2.3	129.4	4.2
P2F601010A	10	2,5	3,6	2,5	134.7	4.5
P2F601011A	11	2,7	3,8	2,6	140.0	4.7
P2F601012A	12	3,0	4,1	2,8	145.5	5.0
P2F601013A	13	3,2	4,3	2,9	150.8	5.2
P2F601014A	14	3,5	4,6	3.0	156.1	5.5
Cod produs	Nr. trepte	Inaltime podina [m]	Inaltime platforma [m]	Lungime platforma [m]	Masa [kg]	Inaltime max. de lucru [m]
P2F60104T	4	1,0	2,1	1,6	99.5	3.0
P2F60105T	5	1,2	2,3	1,7	106.0	3.2
P2F60106T	6	1,5	2,6	1,9	112.3	3.5
P2F60107T	7	1,7	2,8	2.0	118.8	3.7
P2F60108T	8	2,0	3,1	2.2	125.3	4.0
P2F60109T	9	2,2	3,3	2.3	131.8	4.2
P2F601010T	10	2,5	3,6	2,5	138.3	4.5
P2F601011T	11	2,7	3,8	2,6	144.7	4.7
P2F601012T	12	3,0	4,1	2,8	151.6	5.0
P2F601013T	13	3,2	4,3	2,9	157.7	5.2
P2F601014T	14	3,5	4,6	3.0	164.2	5.5

Cod produs	Nr. trepte	Inaltime podina [m]	Inaltime platforma [m]	Lungime platforma [m]	Masa [kg]	Inaltime max. de lucru [m]
P2F60104G	4	1,0	2,1	1,6	93.5	3.0
P2F60105G	5	1,2	2,3	1,7	98.4	3.2
P2F60106G	6	1,5	2,6	1,9	103.4	3.5
P2F60107G	7	1,7	2,8	2.0	108.4	3.7
P2F60108G	8	2,0	3,1	2.2	113.4	4.0
P2F60109G	9	2,2	3,3	2.3	118.3	4.2
P2F601010G	10	2,5	3,6	2,5	123.2	4.5
P2F601011G	11	2,7	3,8	2,6	128.2	4.7
P2F601012G	12	3,0	4,1	2,8	133.3	5.0
P2F601013G	13	3,2	4,3	2,9	138.2	5.2
P2F601014G	14	3,5	4,6	3.0	143.1	5.5

**Caracteristici produs:**

COMPONENTA

- 1 - Balustrada podina - 3 buc.
- 2 - Balustrada scara - 2 buc.
- 3 - Podina (sau platforma) - 1 buc.
- 4 - Ansamblu sustinere podina -2 buc.
- 5 - Rigidizare podina - 4 buc.
- 6 - Rigidizare scara - 1 buc.
- 7 - Traversa baza - 2 buc.
- 8 - Scara - 1 buc.



**Caracteristici:**

- latime trepte: **600 / 800 / 1000 mm**
- grosime trepte: **40 mm**
- adancime trepte: **175 mm**
- distanta intre doua trepte consecutive
  - a) pe verticala: **250 mm**
  - b) pe orizontala: **144 mm**
- inaltime balustrade: **1000 mm**

**OBS:** La baza produsul dispune de un sistem surub/piulita ce permite reglarea inaltimi pe o distanta de 5 cm pentru compensarea diferentelor de nivel. Dupa compendare , produsul trebuie incastrat in pardosea